

# Sensor SB-19

## DESCRIPTION:


NTC sensor with thermoplastic polyester cable and covered with a stainless steel shell. Operates in temperatures from  $-50^{\circ}\text{C}$  to  $105^{\circ}\text{C}$  ( $-58^{\circ}\text{F}$  to  $221^{\circ}\text{F}$ ).

## COMPATIBLE INSTRUMENTS:

All temperature instruments, **except** models:

- MT-622E
- TO-711F
- TO-712F
- TO-741B
- TO-711B
- TO-712B
- TO-721B
- TO-761B

## DIMENSIONS\*:

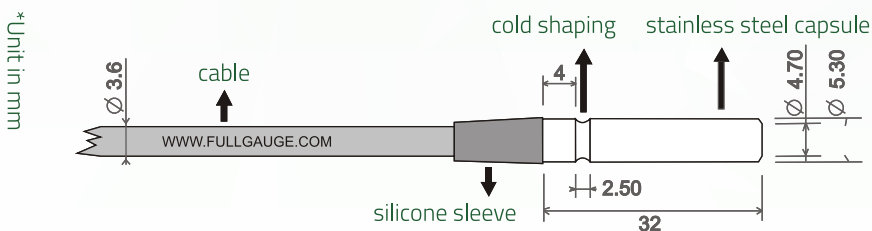

**CABLE COLOR:**  
Black / Gray

**CAPSULE TYPE:**  
Stainless steel

## MORE INFORMATIONS:

- **NTC:** Resistance of 10K Ohms at  $25^{\circ}\text{C}$  ( $77^{\circ}\text{F}$ )
- **Temperature range:**  $-50^{\circ}\text{C}$  to  $105^{\circ}\text{C}$  ( $-58^{\circ}\text{F}$  to  $221^{\circ}\text{F}$ )
- **Precision Full Scale P. F. S.:** 1% FS
- **Response time:** Less than 8 seconds (in stirred water)
- **Tensile test:**  $P_{\text{max}} = 4\text{kgf}$

## FULL GAUGE'S TIP

The accessories that will simplify your installation.



CONTACT OUR SALES TEAM FOR MORE INFORMATION.



[www.fullgauge.com](http://www.fullgauge.com)  
[comex@fullgauge.com](mailto:comex@fullgauge.com)